




قفل هوشمند Smart Lock

ویژگی ها:

- پایش لحظه‌ای وضعیت قفل برای کنترل دقیق و مدیریت بهتر امنیت
- هشدار ضد دستکاری در صورت تلاش برای باز کردن غیرمجاز
- مجهز به باتری داخلی ۱۴۰۰۰ mAh برای ۷۸ روز
- بدنه پلی کربنات مقاومت در برابر آب و شرایط سخت با استاندارد IP۶۷

امکانات :

- هشدار خروج از محدوده
- قابلیت باز و بسته کردن قفل با کارت RFID برای سهولت و امنیت بیشتر
- طراحی بدون دکمه روی بدنه جهت افزایش ایمنی و جلوگیری از دستکاری
- نمایشگر وضعیت دستگاه

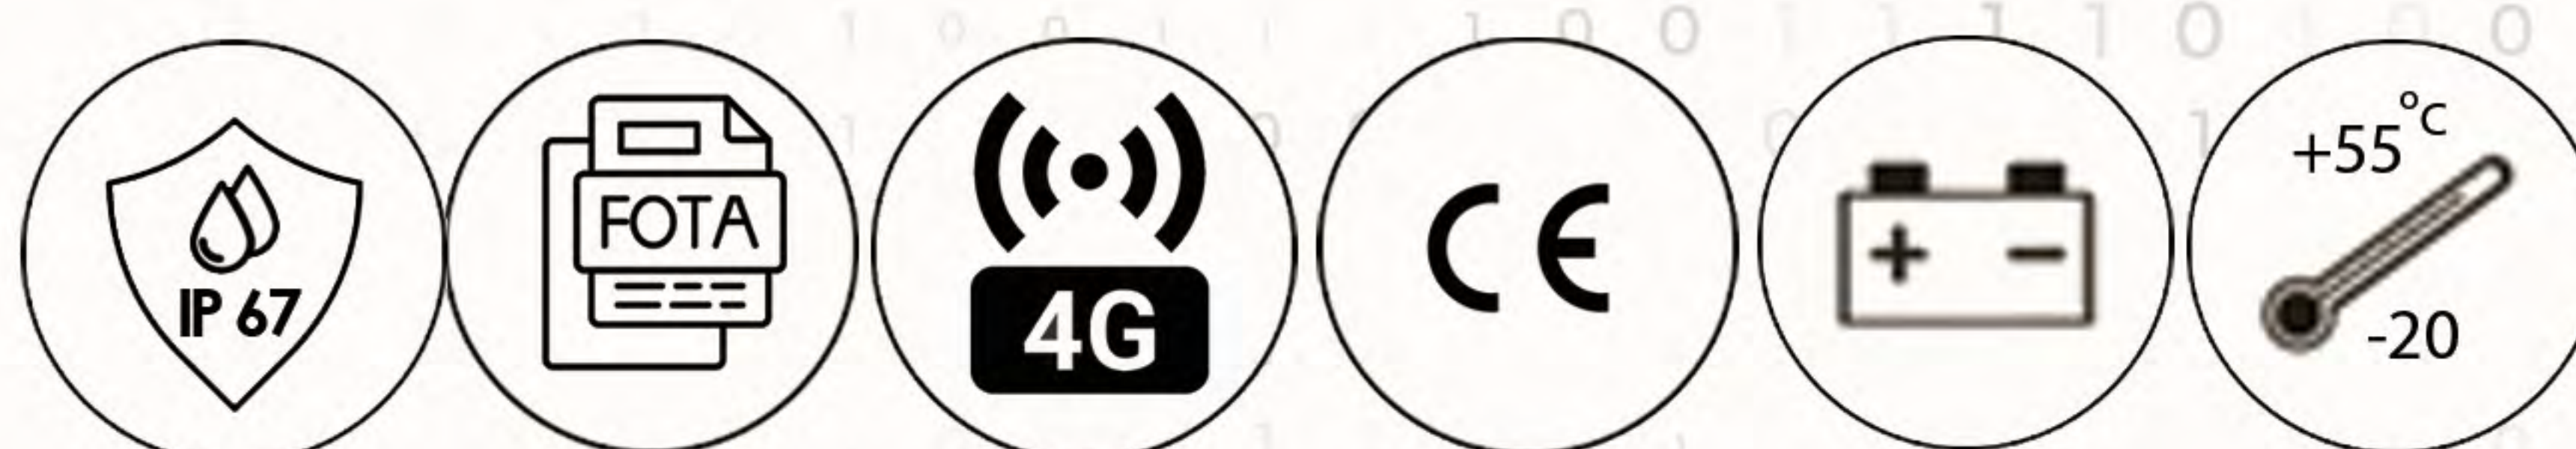

کاربردها:


مناسب برای مدیریت قفل در حمل و نقل زمینی و دریایی از جمله کامیون‌ها، تریلرها و کانتینرها

لوازم جانبی اختیاری

■ کابل USB

لوازم جانبی

- آداپتور ۹ ولت
- کارت RFID
- کابل شارژ مغناطیسی
- کابل فلزی ۳۰ سانتی متری قفل

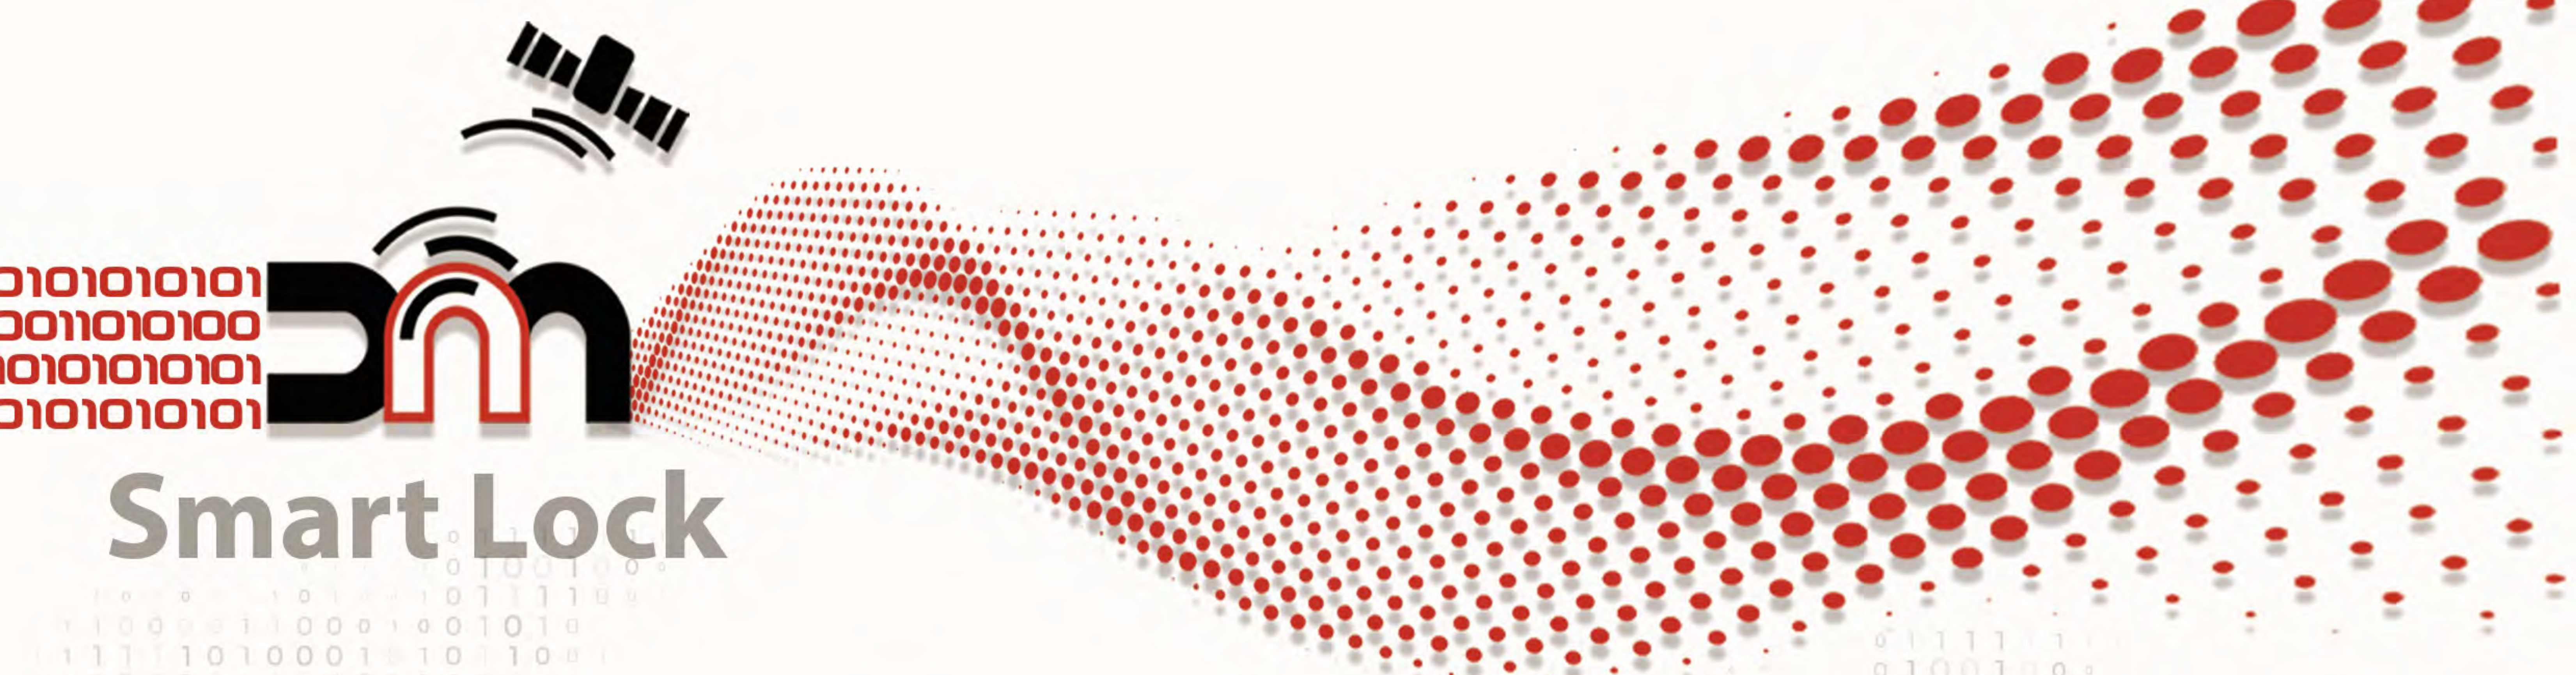

Smart Lock

► Hardware Specifications And Features:

Power Supply

- Rated Voltage
DC 9–14 V; 2 A
- Backup Battery
14000 mAh/3.7 V

Power Consumption

- Current in standby (sleep) mode:
9 mA
- Current in normal working mode:
95 mA
- Charging time:
7.5–8 hours
- Charging:
Magnetic charging (DC 9 V; 2 A; fast charging)

Working Conditions

- Operating temperature
-20°C to 55°C
- Operating humidity
5%–95 %
- Working hour
Power-saving mode: 78 days
Normal working mode: 150 hours


Communication & Positioning

- GPS antenna:
Built-in GPS antenna
- GPS sensitivity:
-161 dB
- Positioning accuracy:
2.5 meters
- GNSS:
GPS/Glonass/BeiDou/Galileo
- GSM:
2G/3G/4G

Others

- RFID module frequency:
125 KHz
- SIM card installation:
Supports Micro & dual SIM cards
- Outer case
Dimension: 112 mm x 195 mm x 37 mm
Material: The outer case of the device adopts PC materials
- Weight: 800g
- Water resistance rating: IP67
- Lock rope length: 300 mm (The length can be customized as needed.)
- Internal Memory:
64 MB

Smart Lock Tracking System

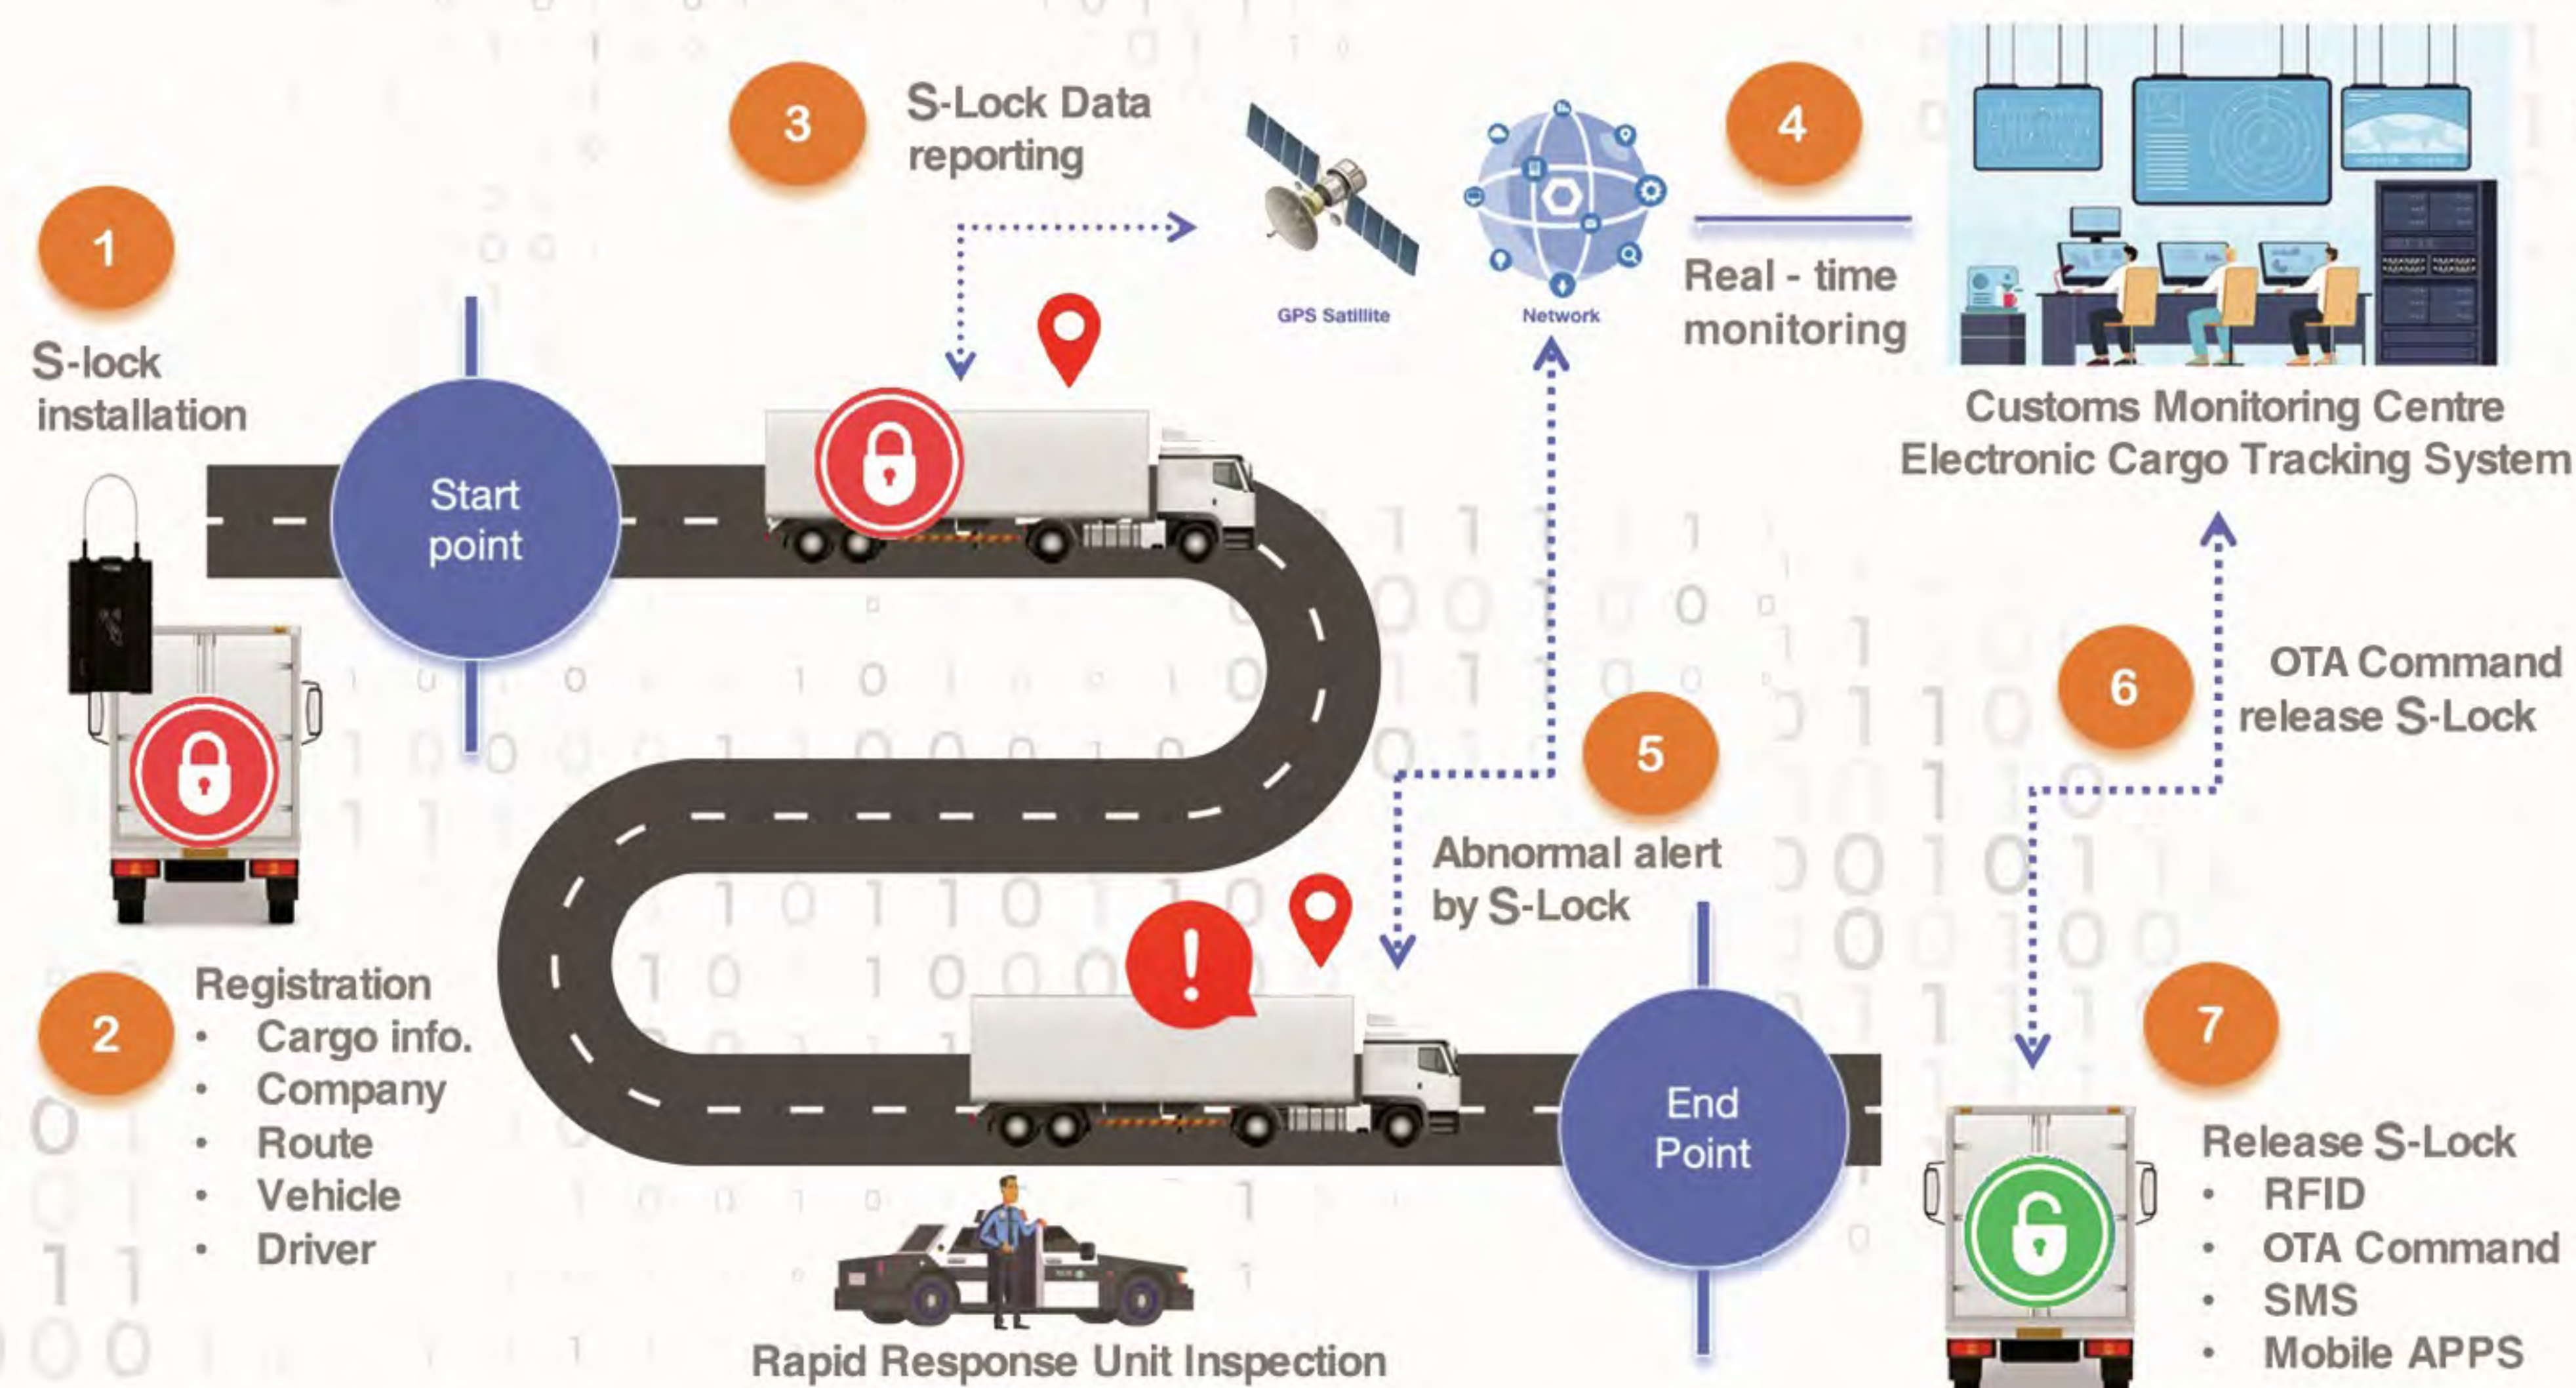

Scan For More
Information



DNM Telematics

Info@dnm.co.ir

@dnmcompany

@dnmcompany